

## ULTRASONIC VELOCITY MEASURING SYSTEM FOR ROCK SAMPLE

# SonicViewer-SX



### < Abstract >

The SonicViewer-SX is an instrument for the ultrasonic wave velocity measurement of rock samples.

It is possible to read the P and S wave propagation with high accuracy, because it contains high voltage (500V) pulser and receiver which consist of 12 bit/ 50nsec A to D converter. It can calculate dynamic Poisson's ratio, dynamic elastic modulus and dynamic shear modulus by built in software. It's based on the Windows XP with color display, Hard disk drive, USB2.0 ports with higher quality and reliable field performance.

### < Features >

- Propagation time can read from wave form of P and S with high accuracy.
- High resolution and high speed 12 bit/50nsec A to D converter available.
- Built in software available for calculate of dynamic Poisson's ratio, dynamic shear modulus etc.
- The measured data can be stored in large capacity of internal hard disk.
- A mouse can be used with this unit.
- High brightness, large screen (10.4 inch) XGA/TFT color display has been adopted.
- Signal stacking function improves the S/N ratio and widen its applicability.

## <Specifications>

### ●Transmitter

Output voltage : 500V  
Pulse width : 6 $\mu$ sec $\pm$ 2 $\mu$ sec

### ●Receiver


Input impedance : 1M $\Omega$   
Gain : 1, 2, 5, 10, 20, 50, 100, 200  
Frequency range : 10 – 1000 KHz  
Low pass filter : 200 KHz

A/D resolution : 12 bit  
Sample rate : 50, 100, 200, 500, 1000, 2000nsec  
Data length : 1024

### ●System

CPU :ULV Intel Celeron Processor 400MHz  
Internal HDD : 80GB  
Memory : 256MB  
Interface : USB2.0 port  $\times$ 3 (Front 2, Rear 1)  
Display : 10.4", XGA/TFT color LCD  
Power requirement : DC12V (10.5V to 13.2V)  
Dimensions : 330 x 270 x 220 mm  
Weight : 8kg

## <Example record>

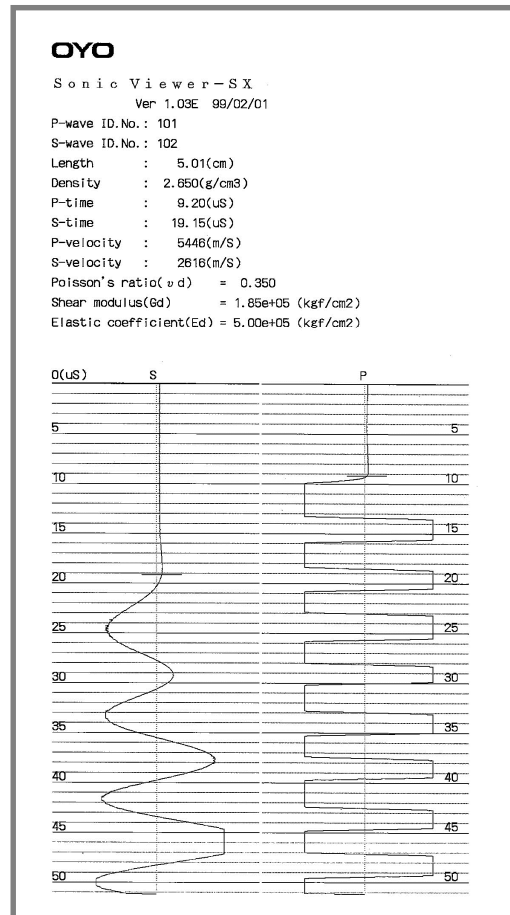

## <Option>



- AC adapter  
Input voltage : AC 85-120V  
Output power : DC12V, 14A



- Thermal printer  
Printing width : 108mm  
Paper width : 112mm  
Resolution : 12 dots/mm



- Transducers  
P-wave transducer: 200KHz  
500kHz  
S-wave transducer: 100KHz

**OYO**  
oyo corporation



JQA-2772

Please note specifications are subject to change without notice for the improvement.

- Instruments & Solutions Division  
43 Miyukigaoka, Tsukuba, Ibaraki, 305-0841 Japan  
Phone: +81-(0)298-51-5078, Fax: +81-(0)298-51-7290  
e-mail: seihin@oyo.jp

- Sigmatic, S.A. de C.V.  
Erasmus Castellanos Quinto 444,  
Colonia Educación, México, D.F., C.P. 04400 Teléfono:  
55.5658.2997 & 55.5554.9657

- Your representative

  
**sigmetic**<sup>®</sup>  
www.sigmetic.com